



Center Distance

$a_o = 100 \text{ mm}$

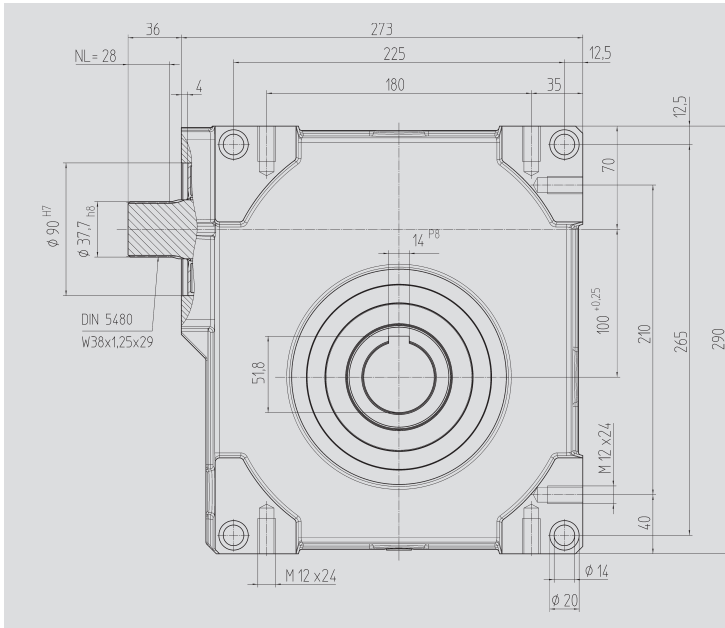


Fig. 1 Output shaft with key connection



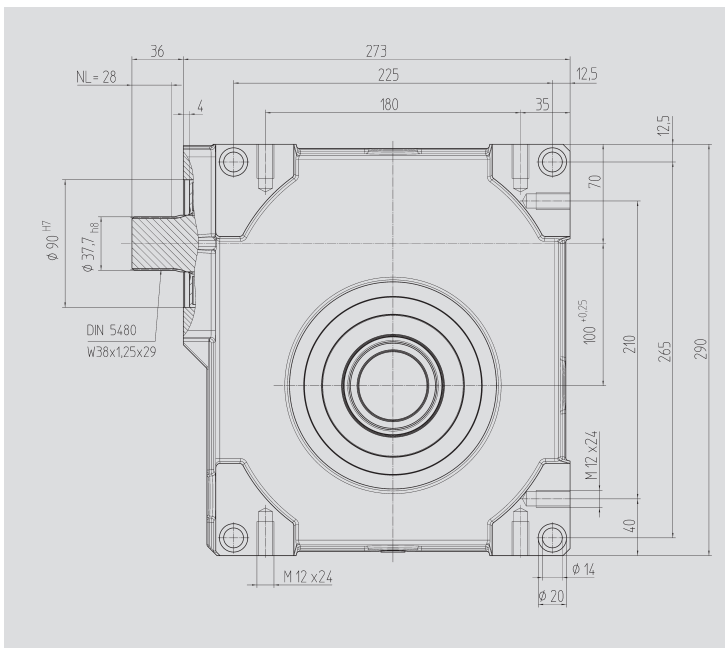


Fig. 2 Output shaft for clamp connection 80 86 062

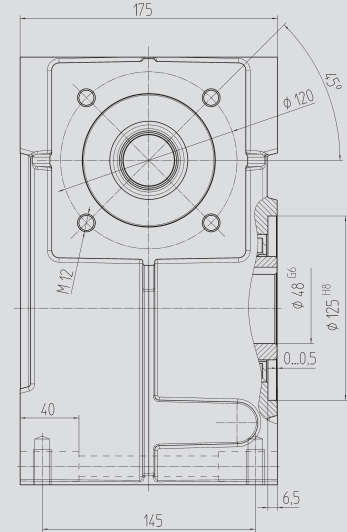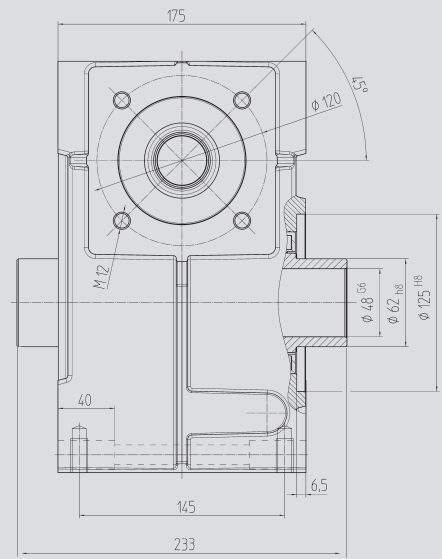

Order Code  
Fig. 1

Fig. 2

Ratio  $i$

$\frac{kg}{kg}$

$J_{red} 10^{-4}$   
kg m<sup>2</sup>


59 06 005	59 16 005	4.75	37	22.9320
59 06 007	59 16 007	6.75	37	12.8835
59 06 009	59 16 009	9.25	37	8.0975
59 06 015	59 16 015	14.50	37	7.2190
59 06 020	59 16 020	19.50	37	5.4030
59 06 029	59 16 029	29.00	37	4.7207
59 06 039	59 16 039	39.00	37	8.4300
59 06 052	59 16 052	52.00	37	9.7400

With food grade oil, order code 59 06 1xx / 59 16 1xx

With ATEX version with food grade oil, order code 59 06 2xx / 59 16 2xx



**Motor Flange**

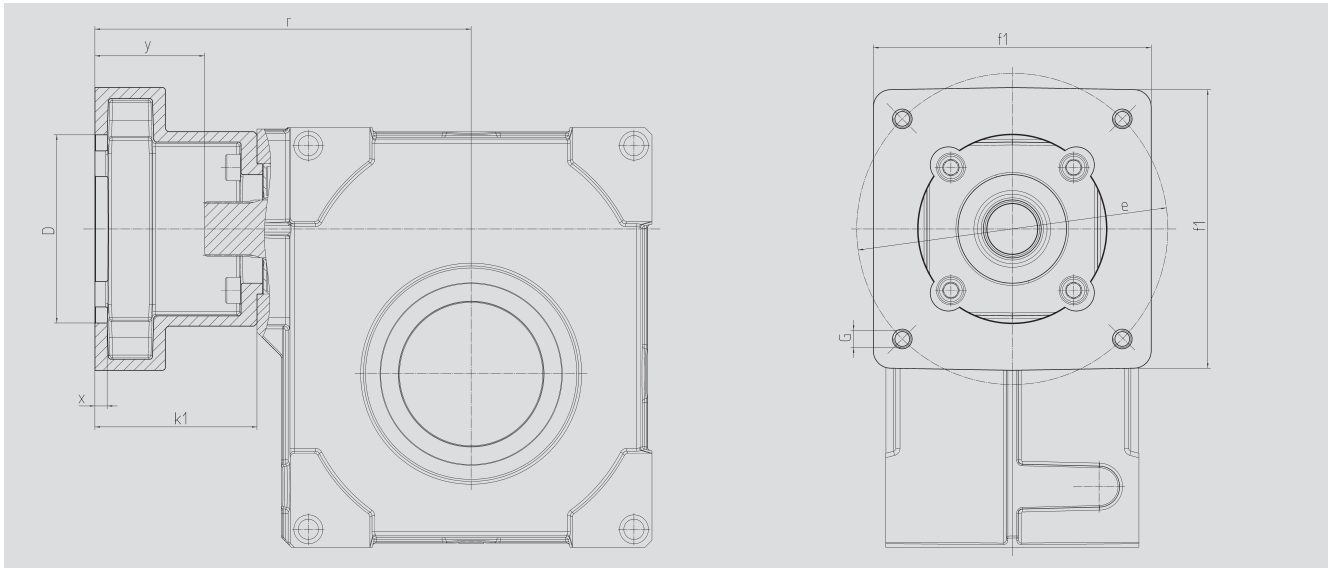

**Center Distance**

**$a_o = 100 \text{ mm}$**

Order Code	D <sup>G7</sup>	k <sub>1</sub>	r	x	y	f <sub>1</sub>	e	G	kg
65 59 501	110.0	92.0	240.0	8.0	55.0	140	165	M10	2.00
65 59 502	130.0	92.0	240.0	8.0	55.0	140	165	M10	1.90
65 59 503	180.0	122.0	270.0	8.0	85.0	192	215	M12	3.40
65 59 504	180.0	127.0	275.0	8.0	90.0	192	215	M12	3.80
65 59 505	180.0	112.0	260.0	10.0	75.0	192	215	M12	2.70
65 59 506	130.0	112.0	260.0	10.0	75.0	192	215	M12	3.00
65 59 507	130.0	112.0	260.0	10.0	75.0	140	165	M10	2.50
65 59 508	110.0	90.0	238.0	8.0	53.0	140	145	M8	2.00
65 59 509	110.0	108.5	256.5	8.0	71.5	140	145	M8	2.50
65 59 510	114.3	129.5	277.5	8.0	92.5	180	200	M12	5.00
65 59 511	114.3	163.5	311.5	8.0	126.5	180	200	M12	4.20
65 59 512	114.3	105.5	253.5	8.0	68.5	180	200	M12	3.50
65 59 513	110.0	113.5	261.5	8.0	76.5	140	145	M8	2.70

The order should contain gear box 59 06 0xx / 59 16 0xx and flange 65 59 5xx.