



ATLANTA

Operating Instructions


BKI 102 e

4100-001-04/93

Department	TB
Rev. Index	B
Date	15.08.06

Electronically controlled lubricators
125 cm³ – battery-operated
 applicable to 65 91 000; 65 91 004; 65 91 009


Page	1	1
Name	Schell	14.10.03
released	TB/Lorch	14.10.03

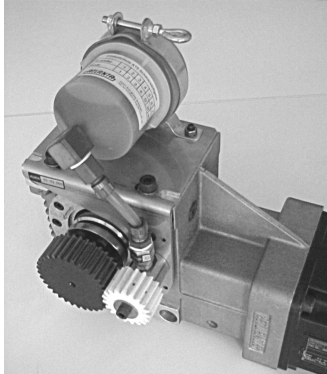


Features:

- Precise dosing of lubricant.
- Activation, deactivation, and setting of grease supply via micro-switch.
- Automatic pressure control from 0.2 to 3 bar.
- Non-explosive – Ex protection PTB; BVS and CE tested.
- To be mounted in any position.
- Can be used again and again for many years.
- Refillable.


Start-up:




Remove protective lid and switch on lube dispenser



Any dosage required can be set via DIP switch combinations




DIP switch 7 active, indicator light blinks approx. every 20sec




To switch off: turn all switches down

Synchronisation with machine operating time

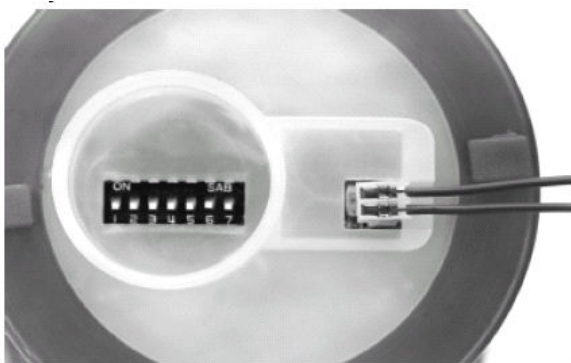

Setting same as so far. Extend contact cable and connect to limit switch or contactor with floating contact. No external power supply required.

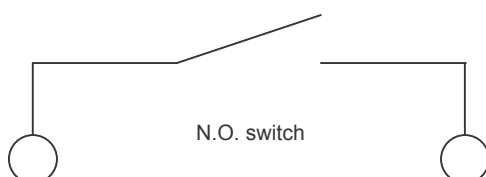

Advantages:

Change of lubricating time or combinations of switching times possible (see also page 2 setting combinations).

Battery-operated:

Battery capacity approx. = 2600 mA

Consumption in 1 year:
 25 microamperes x 8640 h = 216 mA

Signal light:

8 microamperes x 8640 h = 69 mA

Yearly consumption = 285 mA

Tip:

Before using the lube dispenser for the first time fill the hose with grease and soak the felt gearwheel with grease. Visual control of the grease filling at the transparent housing of the lube dispenser. Signal light blinks also when the lube dispenser is empty. Optionally available are also lube dispensers with emptying monitor.



ATLANTA

Operating Instructions

BKI 102 e

4100-001-04/93


Department	TB
Rev. Index	B
Date	15.08.06

Electronically controlled lubricators
125 cm³ – battery-operated
 applicable to 65 91 000; 65 91 004; 65 91 009

Page	2	2
Name	Schell	14.10.03
released	TB/Lorch	14.10.03

Pressure build-up times:

The batteries need a certain time to build up the pressure. They induce an electro-pneumatic reaction in the built-in nitrogen chamber and transmit the pressure to the piston via a bellows. This chamber has to be replaced at the end of the lubricating time.

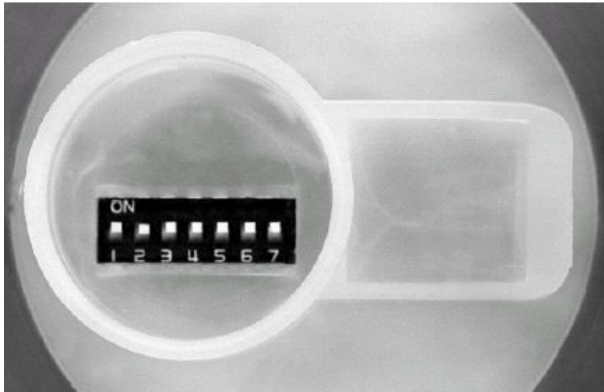

Simply set the desired operating time and mount it. The resulting pressure build-up times are then as follows:

Setting time in months	1	2	3	6	12	18
DIP switch	1	2	3	4	5	6
Pressure build-up time in days	1	2	3	6	10	14

Lubrication starts after the appropriate pressure build-up. The pressure remains built-up even if the lubricator is switched off for some time. Therefore lubrication begins immediately after switching on the lubricator again because the pressure remains built-up.

Immediate lubrication and safety check

Set all switches to the "on" position. Pressure build-up time approx. 6 – 8 hours. Then reset all switches and set the desired operating time. The signal light blinks.

Visual control of the pressure build-up by marking the filling state at the transparent housing. Depending upon the dosage chosen the piston in the lube dispenser should move downward from the marking for more or less time during the pressure build-up.

Important information!

Ambient temperature max. -20°C to max. +50°C.
 Avoid electrostatic charging of the lube dispenser (e.g. due to friction with cloth or strong air currents).

Setting combinations for lube dispenser

DIP switch position	Daily amount of lubricant	Lubricating time of lubricator
7 = switch for „ON“ - signal light blinks at short intervals		
6 = 18 M	0.175 cm ³	18 months
5 = 12 M	0.35 cm ³	12 months
4 = 6 M	0.70 cm ³	6 months
3 = 3 M	1.30 cm ³	3 months
2 = 2 M	2.10 cm ³	2 months
1 = 1 M	4.00 cm ³	1 month
All switches activated	9.00 cm ³	14 days
Combinations:		
5 + 4	1.05 cm ³	121 days
5 + 3	1.74 cm ³	71 days
4 + 3	2.08 cm ³	57 days
5 + 4 + 3	2.35 cm ³	52 days
5 + 2	2.45 cm ³	51 days
4 + 2	2.60 cm ³	45 days
3 + 2	3.48 cm ³	35 days
5 + 3 + 2	3.83 cm ³	30 days
4 + 3 + 2	4.16 cm ³	28 days
5 + 4 + 3 + 2	4.53 cm ³	27 days
4 + 1	4.80 cm ³	24 days
3 + 1	5.56 cm ³	23,5 days
2 + 1	6.26 cm ³	20 days
5 + 2 + 1	6.61 cm ³	19 days
3 + 2 + 1	7.65 cm ³	17 days
5 + 3 + 2 + 1	8.00 cm ³	16 days
4 + 3 + 2 + 1	8.33 cm ³	15 days
5+4+3+2+1	8.70 cm ³	14.5 days

Technical tips:

Extension with hose or tube is possible up to approx. 1.5 m for grease lubrication and 5 m with oil lubrication. In this case the lubrication charts do not apply because the viscosity of the lubricant and the length of the hose influence the flow behaviour of the lubricant. Mind the correction factors on page 3. There is less resistance in case of oil filling; therefore we recommend to use a check valve with 0.2 bars. The lube dispenser lubricates constantly, i.e. no impulse lubrication.

Technical data:

Supply voltage (2 x 1.5V) 3V
 BSV 03 ATEX E 223
 Standard type: Varta Electric Power 8008 for Groups I and IIC T 3
 Special type: Varta Industrial Mignon / AA for Groups I and IIC T 4
 II 2G EEx ib IIC T4/T3
 I M2 EEx ib I
 No Ex protection is provided for lube dispensers with synchronisation.





ATLANTA

Operating Instructions

BKI 102 e

4100-001-04/93

Department	TB	Electronically controlled lubricators 125 cm³ – battery-operated applicable to 65 91 000; 65 91 004; 65 91 009	Page	3	3
Rev. Index	B		Name	Schell	14.10.03
Date	15.08.06		released	TB/Lorch	14.10.03

Correction factors for lubricant dosage:

Tube/hose length mm	Synchronous operation with machine f_{sv}	Tube/hose connecting set f_{SR}
<200	1,25	1
>200	1,25	1,16

If not synchronised with the machine operating time (in the case of continuous lubrication), only the factor f_{SR} will be considered.

Temperature factor f_T :

Temperature range	Microlube GB O	Structovis AHD
-20 ...+15°C	2	1,5
+15 ...+35°C	1	1
+35 ...+50°C	0,5	0,7

Note:

The correction factors are based upon experience values determined by experiments. If required and/or for specific applications they should be verified and adapted as necessary.

Example:

A toothed-rack gear unit $m=2$ with a travelling speed of $v = 1,5\text{m/s}$ shall be lubricated with an electronically controlled lube dispenser via a felt gearwheel with Klüber Structovis AHD. The following parameters are to be considered:

- The grease supply from the lube dispenser to the felt gearwheel runs through a hose which is 600 mm long.
- The lube dispenser shall be synchronised with the machine.
- Ambient temperature 10°C.

According to the grease dosage diagram for felt-wheel lubrication (catalogue Servo-drive Systems) the dosage for this type of drive is approx. 0,35 cm³ of grease.

The actually needed amount of lubricant, if the described parameters are considered, can be calculated as follows:

$$0,35 \times 1,16 \times 1,25 \times 1,5 = 0,76 \text{ cm}^3$$

In the chart „setting combinations for lube dispensers“ the lubricant quantity of 0,7 cm³, corresponds to the DIP-switch position 4 .