


## Helical-Tooth Pinion, 19° 31' 42" left-hand, with plain bore

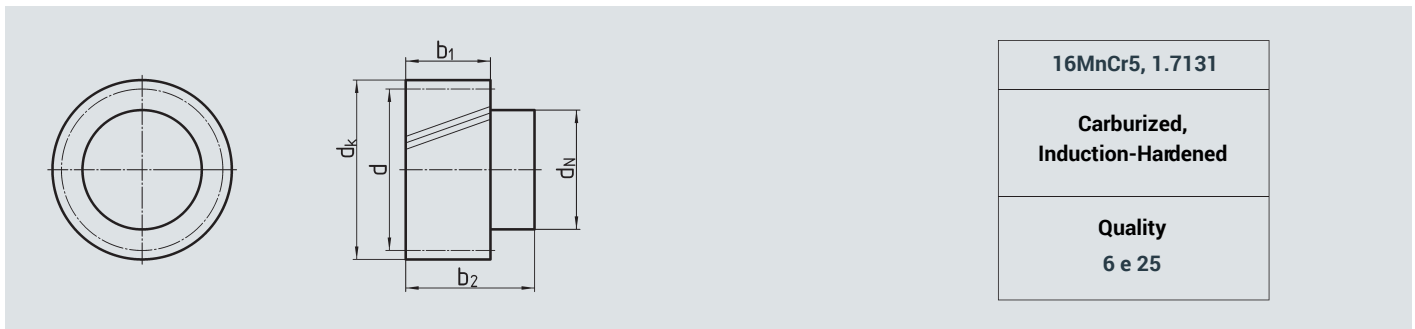


Order Code	Module	N° of Teeth z	d (=d <sub>wz</sub> )	d*PI	d <sub>k</sub>	d <sub>N</sub>	b <sub>1</sub>	b <sub>2</sub>	kg	Couplings on Page C-76
24 99 121	1.5	21	33.42	105.00	36.4	30	20	46	0.3	80 83 030
24 99 218	2	18	38.20	120.00	42.2	30	28	56	0.3	80 83 030
24 99 220	2	20	42.44	133.33	46.4	30	28	56	0.4	80 83 030
24 99 222	2	22	46.69	146.67	50.7	36	28	56	0.5	80 84 036
24 99 225	2	25	53.05	166.67	57.1	44	28	60	0.8	80 80 044
24 99 228	2	28	59.42	186.67	63.4	50	28	60	1.0	80 85 050
24 99 230	2	30	63.66	200.00	67.7	50	28	60	1.1	80 85 050
24 99 232	2	32	67.91	213.33	71.9	55	28	65	1.4	80 80 055
24 99 318	3	18	57.30	180.00	63.3	44	28	60	0.8	80 80 044
24 99 320	3	20	63.66	200.00	69.7	50	28	60	1.0	80 85 050
24 99 322	3	22	70.03	220.00	76.0	55	28	65	1.4	80 80 055
24 99 325	3	25	79.58	250.00	85.6	62	28	65	1.8	80 86 062
24 99 328	3	28	89.13	280.00	95.1	68	28	65	2.3	80 80 068
24 99 418	4	18	76.39	240.00	84.4	62	40	77	2.0	80 86 062
24 99 420	4	20	84.88	266.67	92.9	62	40	77	2.4	80 86 062
24 99 421	4	21	89.13	280.00	97.1	68	40	77	2.8	80 80 068
24 99 422	4	22	93.37	293.33	101.4	68	40	77	2.9	80 80 068
24 99 424	4	24	101.86	320.00	109.9	80	40	80	3.9	80 87 080
24 99 425	4	25	106.10	333.33	114.1	80	40	80	4.0	80 87 080
24 99 522	5	22	116.71	366.67	126.7	80	50	90	5.5	80 87 080
24 99 524	5	24	127.32	400.00	137.3	110	50	110	9.6	80 80 110
24 99 525	5	25	132.63	416.67	142.6	110	50	110	9.1	80 80 110
24 99 620	6	20	127.32	400.00	139.3	110	60	120	9.7	80 80 110
24 99 820 <sup>1)</sup>	8	20	169.77	533.33	185.8	125	80	145	19.4	80 80 125

<sup>1)</sup> With bore  $\varnothing 40^{H7}$

The pinion could be fixed at d<sub>k</sub> or d<sub>N</sub> to be reworked.

Maximum bore diameter of the pinion on request.

Straight-Tooth Pinion, with plain bore

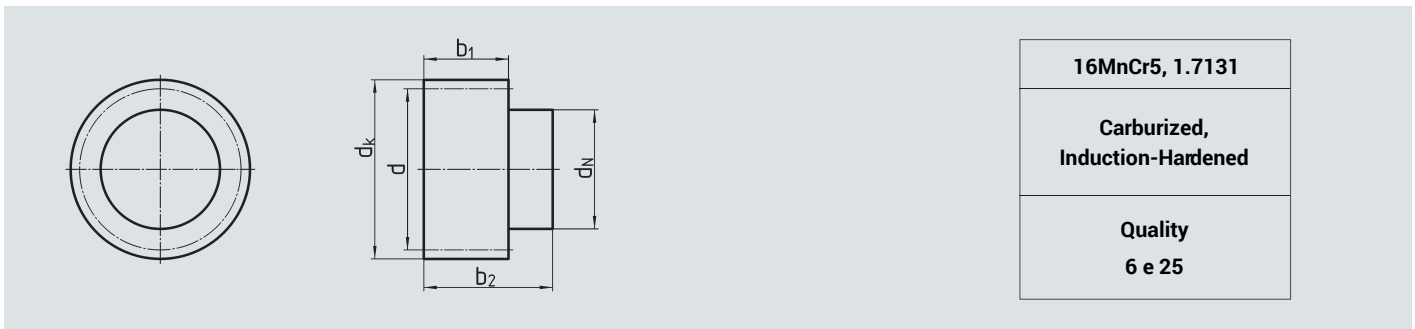

Order Code	Module	N° of Teeth z	d (=d <sub>wz</sub> )	d <sub>k</sub>	d <sub>N</sub>	b <sub>1</sub>	b <sub>2</sub>	T kg	Coupling on page C-76
24 98 218	2	18	36	40	30	28	56	0.3	80 83 030
24 98 220	2	20	40	44	30	28	56	0.4	80 83 030
24 98 222	2	22	44	48	36	28	56	0.5	80 84 036
24 98 225	2	25	50	54	44	28	60	0.7	80 80 044
24 98 228	2	28	56	60	50	28	60	0.9	80 85 050
24 98 230	2	30	60	64	50	28	60	1.0	80 85 050
24 98 232	2	32	64	68	55	28	65	1.3	80 80 055
24 98 236	2	36	72	76	62	28	65	1.6	80 86 062
24 98 240	2	40	80	84	68	28	65	2.0	80 80 068
24 98 318	3	18	54	60	44	28	60	0.8	80 80 044
24 98 320	3	20	60	66	50	28	60	1.0	80 85 050
24 98 322	3	22	66	72	55	28	65	1.3	80 80 055
24 98 325	3	25	75	81	62	28	65	1.7	80 86 062
24 98 328	3	28	84	90	68	28	65	2.1	80 80 068
24 98 330	3	30	90	96	68	28	65	2.2	80 80 068
24 98 332	3	32	96	102	68	28	65	2.4	80 80 068
24 98 336	3	36	108	114	68	28	65	2.8	80 80 068
24 98 340	3	40	120	126	68	28	65	3.3	80 80 068
24 98 418	4	18	72	80	55	40	77	1.7	80 80 055
24 98 420	4	20	80	88	62	40	77	2.2	80 86 062
24 98 422	4	22	88	96	68	40	77	2.7	80 80 068
24 98 425	4	25	100	108	80	40	80	3.7	80 87 080
24 98 428	4	28	112	120	80	40	80	4.4	80 87 080
24 98 430	4	30	120	128	80	40	80	4.6	80 87 080
24 98 432	4	32	128	136	110	40	100	7.9	80 80 110
24 98 436	4	36	144	152	110	40	100	8.9	80 80 110
24 98 440	4	40	160	168	110	40	100	9.9	80 80 110
24 98 521	5	21	105	115	80	50	90	4.9	80 87 080
24 98 522	5	22	110	120	80	50	90	5.0	80 87 080
24 98 525	5	25	125	135	110	50	110	9.0	80 80 110
24 98 528	5	28	140	150	110	50	110	10.2	80 80 110
24 98 530	5	30	150	160	110	50	110	10.9	80 80 110
24 98 621	6	21	126	138	110	60	120	5.9	80 80 110
24 98 625	6	25	150	162	110	60	120	8.9	80 80 110
24 98 820 <sup>1)</sup>	8	20	160	176	125	80	145	18.5	80 80 125

<sup>1)</sup> With bore Ø 40<sup>H7</sup>

The pinion could be fixed at d<sub>k</sub> or d<sub>N</sub> to be reworked.

Maximum bore diameter of the pinion on request.